


# Water Cooled High Power Resistors

These are 500W, 1000W high power resistors exhibiting very low operating temperatures. This model offers very low inductance and high surge handling capacity. It consists of a flat resistive element with twisted air leads. A 5kV dielectric strength is ensured with an alumina substrate. The low operating temperature of the element gives a low failure rate in high-density, compact instruments and equipment. This model can be used in snubber resistors, GTO and IGBT in electric power conversion systems.


## DIMENSIONS (mm)

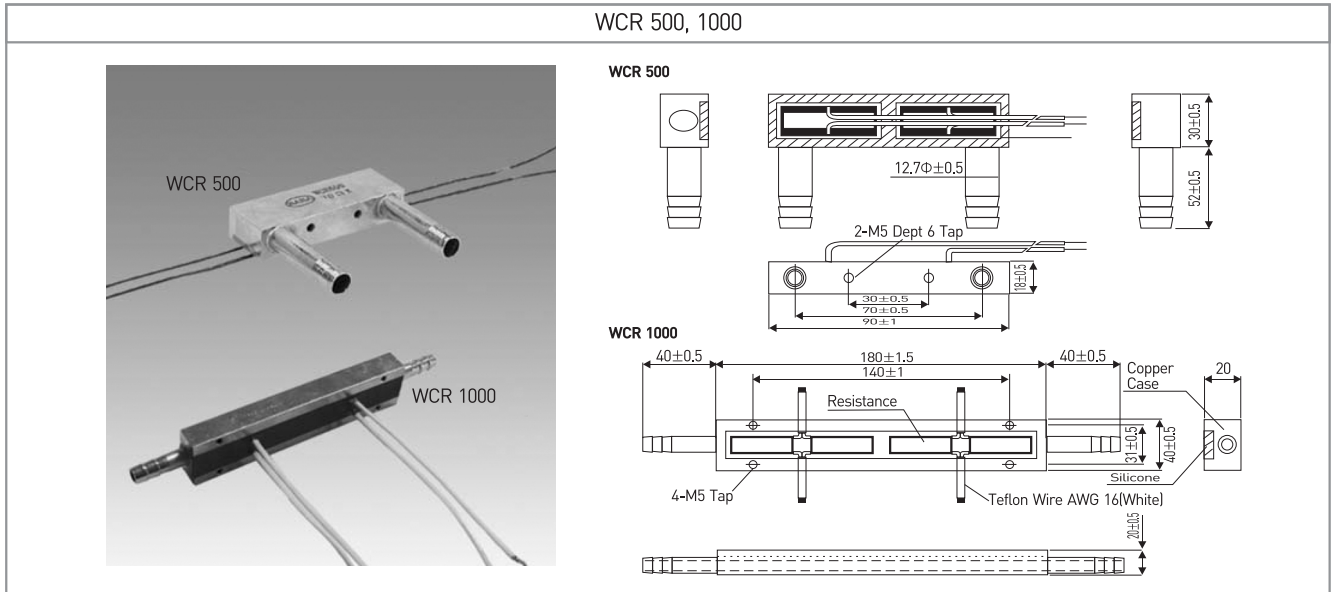

## CHARACTERISTICS


Power Rating	WCR500: 500W(Water cooling)	WCR1000: 1000W(Water cooling)
Resistance Range	Stock Values: 10, 20, 40, 120Ω (Custom Values MOQ: 100pcs / value)	
Temperature coefficient	±250ppm/°C	
Resistance Tolerance	K(±10%)	
Dielectric Withstanding Voltage	AC 2000V between terminals and fin. option: DC 5000V between terminals and fin.	
Series Inductance	40nH / dual resistor(typical)	0.1 μH
Volume of Water Flow	2l / 1minute(minimum)	6l / 1minute(minimum)
Water Temperature	41 °C at maximum at inlet, more than the dew point	
Case Temperature Rise	14 °C	
Water Temperature Rise	1.4 °C	
House Mouth	Standard: Nipple, any types are available	
Surface Temperature Rise	50 °C	
Max. Element Surface Temperature	110 °C	
Water Pressure Loss	0.06 kgf/cm <sup>2</sup>	0.1 kgf/cm <sup>2</sup>
Weight	355(g)	750(g)

## ORDERING PROCEDURE EXAMPLE

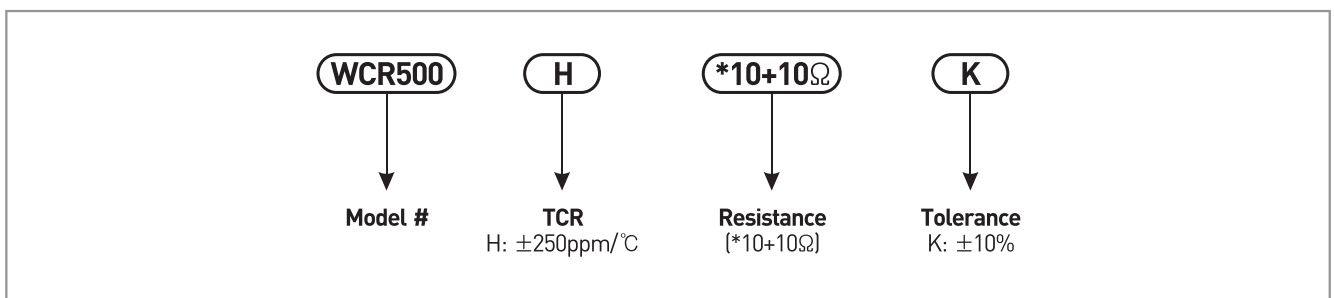


**TEMPERATURE INCREASE VERSUS POWER LOAD (WCR500)**


**Element Surface Temperature Rise**

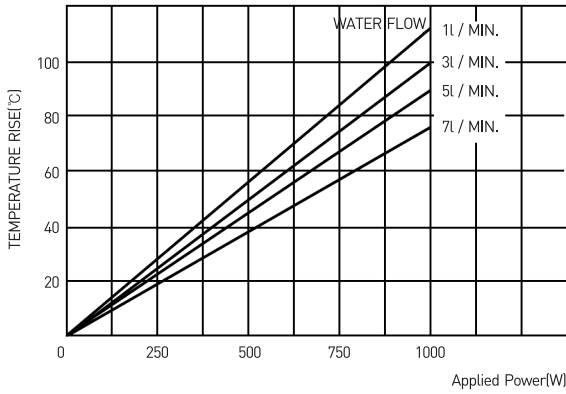


**Load Life Characteristics**

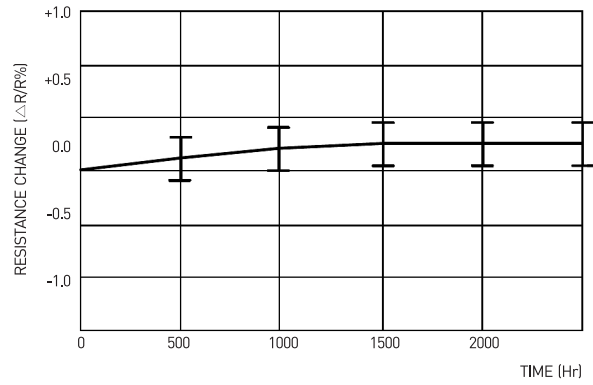


**Case Temperature Rise**

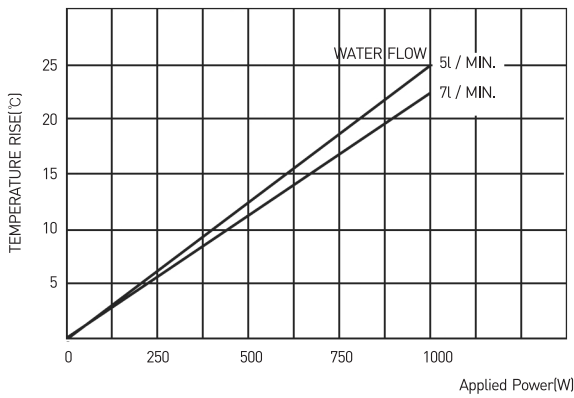

**Impulse Test (Typical)**

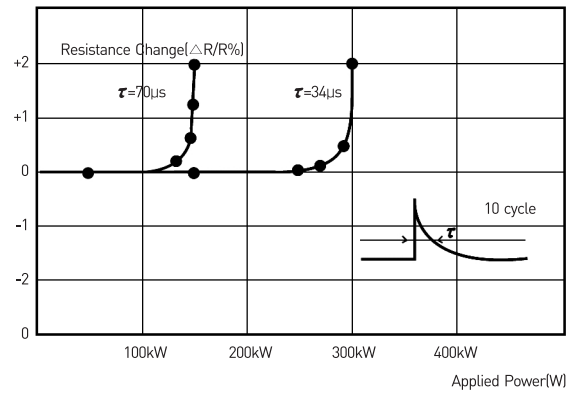

**Cooling Water Temperature Rise Versus Power Rating**

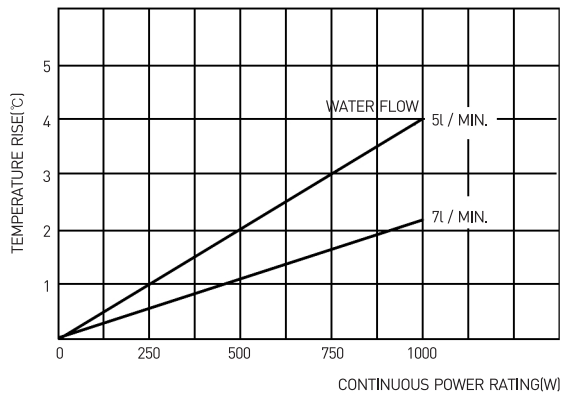

Note: The standard circuit consists of two elements(each with two leads), independently.  
All measuring data was taken by connecting two elements in parallel.

Wire Wound Resistors

Current Sensing Resistors

Precision Resistors

Power Film Resistors

High Voltage Resistors

Bulk Ceramic Resistors

Heaters