

## SPR038 PRECISION SHUNT RESISTOR




The SPR038 is a high precision and compact shunt resistor. They are extremely easy to install and handle a prodigious current. The most common applications for these models are amp meters and current controllers.

### GENERAL SPECIFICATIONS

Rated Current	120 Amps
Rated Voltage	60mV
Resistance Range	0.5mohms
Tolerance	D, F, J
Temp. Coefficient	+ -50ppm/C

### DIMENSIONS

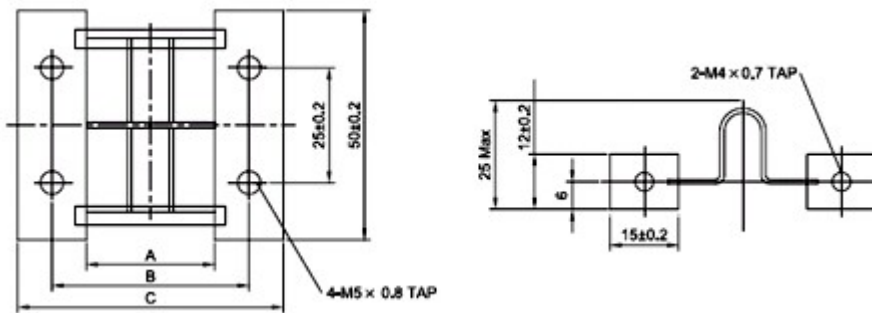

A=28+-1mm  
 B=43+-0.5mm  
 C=58+-1